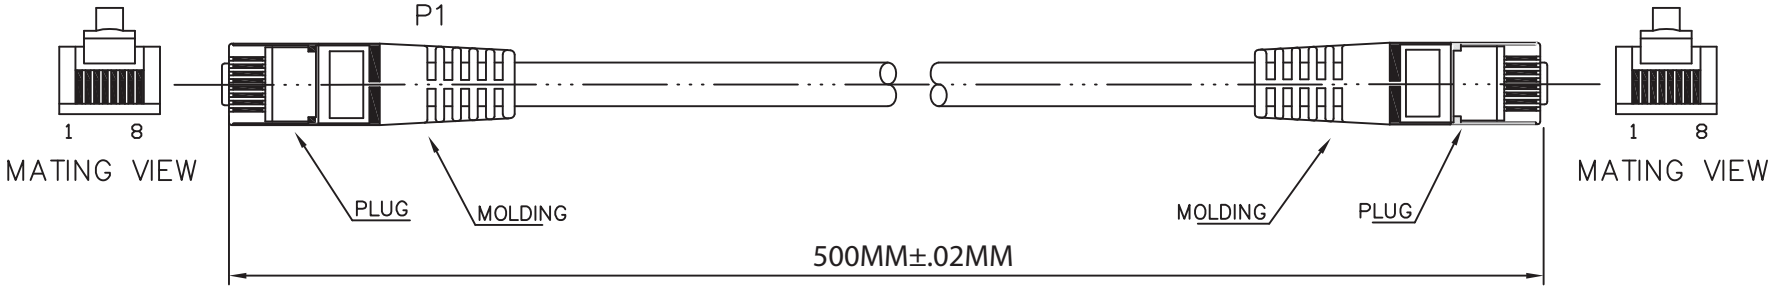

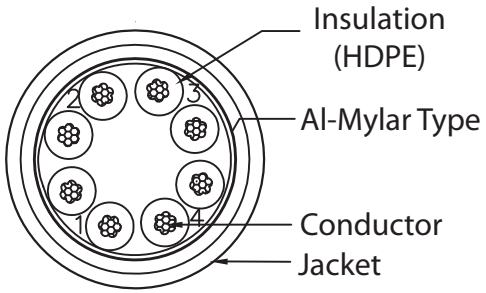



Material:

- Conductor:
  - Bare Copper
  - FTP STR 26AWG*4P
- Insulator:
  - Thickness Min. at any point: 0.15MM
  - Thickness Max. Avg.: 0.25MM
  - Diameter: 0.85±0.06MM
- Jacket PVC:
  - Thickness Min. at any point: 0.50MM
  - Thickness Max. Avg.: 0.60MM
  - Diameter: 5.6±0.02MM

orange 1 white/orange	green 2 white/green		
blue 3 white/blue	brown 4 white/brown		

	PINOUT		
PA/R	P1(T568B)	WIRE	P2(T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	10.28.11	Chappell
Approved	10.28.11	Skinner

ASSMANN WSW components

Item No.
A-MCSP-80005-R

Title
Cat.5e FTP Patch Cable - Grey,
0.5 Meter, 8P8C, Twisted Pair, Foiled Shielded

Drawing No.

rev00

Replace

Sheet