




1	2	3	4	5	6	7
---	---	---	---	---	---	---

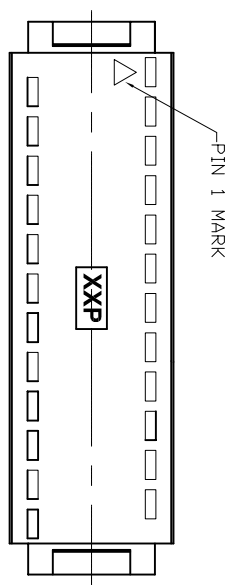



2.54XNo.of Positions+5.26±0.30

1.27±0.10

Cover

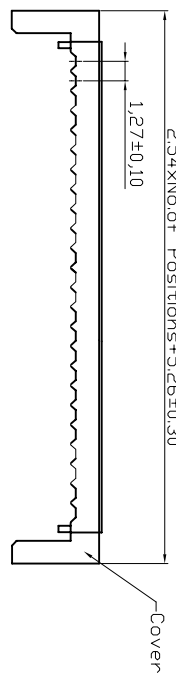

- NOTES:**
- MATERIAL**
1. Insulator Material: PBT+30%GF(UL94V-0), Black
 2. Contact Material : Brass
 3. Contact Plating : Gold Flash Over Ni ELECTRICAL
- ELECTRICAL**
- ① 1. Current Rating : 3.0AMP
 - ① 2. Withstand Voltage : 1000V AC/DC
 - ① 3. Contact Resistance : 20mΩ max
 - ① 4. Insulation Resistance: 1000MΩ min
- ENVIRONMENTAL**
- ① 1. Operation Temperature: -40°C to +105°C
 - ① 2. Packing : Tray

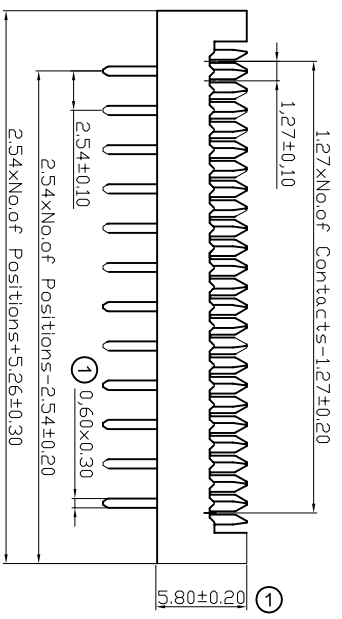

RoHS Compliant
Unit:mm

Scale	Free						
TOLERANCE							
X.X	±0.40				Drawn	Date	Name
X.XX	±0.25				Approved	19.12.2013	Winnie
X.XXX	±0.15	②	Change the P/N				
Angle	±3°	①	Update			30.05.2013	Winnie
		①	Drawn			28.10.2011	Chappell
			Id.	Modification			

1	2	3	4	5	6	7
---	---	---	---	---	---	---



Customer-No.	ASSMANN WSW-No. ② ADIPxx-G-LC
Drawing-No.	ASS 5734 CO
Replace	rev02
Sheet	

A A B C D E F G H