

CONDUCTOR CONSTRUCTION (N/mm) :
41/0.16AS

PVC INSULATION AVERAGE THICKNESS: 0.38mm
ID: 2.10±0.1mm


PVC JACKET AVERAGE THICKNESS: 0.76mm
OD: 6.50±0.15mm

Material:

- E243711(UL) SVT 3 x 18AWG(0.824MM²) VW-1 Unshielded, 60°C 300V - CSA 228191 SVT 3 x 18AWG(0.824MM²) FT2 60°C 300V -LF-
- Jacket Color: Black
- E - Green; L - Black; N - White

Electrical:

- 100% Open & Short Testing
- Insulation Resistance: 100MΩ (Min.)
- Voltage: 500V DC / 1 Min.

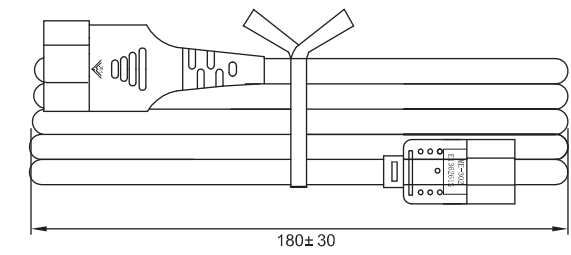

Unit: MM



ITEM NO.
AK500-OE-11-1.5-R

TITLE
Power Cord IEC Extension - SVT, Unshielded, 60°C, 18AWG, 1.5 Meters

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
©Copyright 2011 by Assmann Electronic Components
All International Rights Reserved